


POURED IN PLACE
CONCRETE

NOTES:

1. AFTER PIPE IS INSERTED THROUGH MANHOLE, POUR CONCRETE AROUND PIPE IN MANHOLE.
2. CUT SECTION FROM TOP OF PIPE AND REMOVE IN FIELD FOR PIPE ACCESS.
3. FILL ALL OPEN CORRUGATION VOIDS WITH NON SHRINK GROUT, ENSURING GROUT FILLS THE VOID SPACE ALL THE WAY AROUND CIRCUMFERENCE.
4. STRUCTURE DIAMETER & WALL THICKNESS BY ENGINEER
5. REFER TO ALOK[®] RECOMMENDATION FOR PROPER GASKET & MANDREL SIZING.
6. PIPE TO BE INSERTED INTO THE STRUCTURE ABOVE GRADE AND LOWERED INTO THE TRENCH AS ONE UNIT.

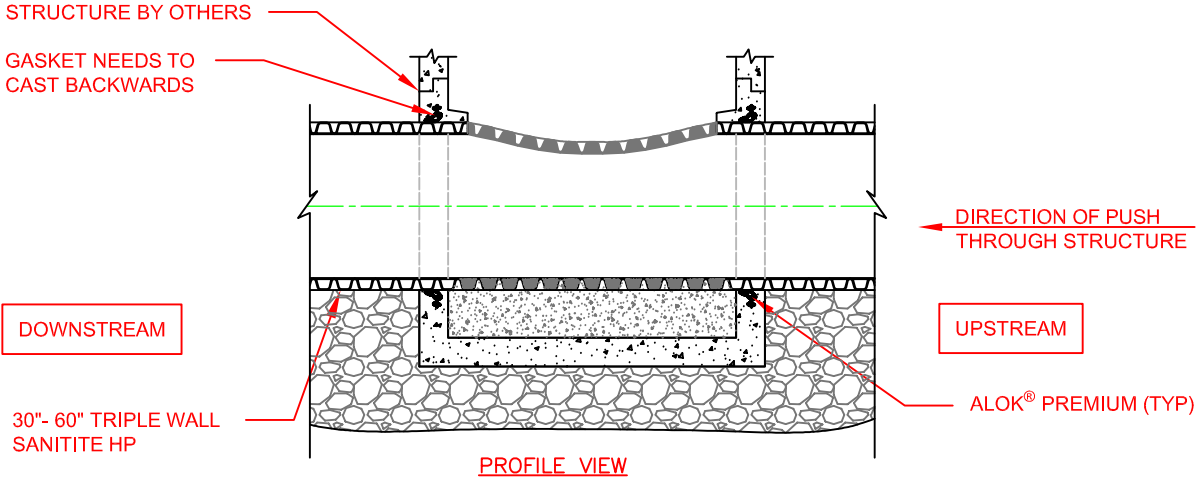

©2016 ADS, INC.

ADVANCED DRAINAGE SYSTEMS, INC. ("ADS") HAS PREPARED THIS DETAIL BASED ON INFORMATION PROVIDED TO ADS. THIS DRAWING IS INTENDED TO DEPICT THE COMPONENTS AS REQUESTED. ADS HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICES FOR THIS PROJECT, NOR HAS ADS INDEPENDENTLY VERIFIED THE INFORMATION SUPPLIED. THE INSTALLATION DETAILS PROVIDED HEREIN ARE GENERAL RECOMMENDATIONS AND ARE NOT SPECIFIC FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION. IT IS THE DESIGN ENGINEERS RESPONSIBILITY TO ENSURE THE DETAILS PROVIDED HEREIN MEETS OR EXCEEDS THE APPLICABLE NATIONAL, STATE, OR LOCAL REQUIREMENTS AND TO ENSURE THAT THE DETAILS PROVIDED HEREIN ARE ACCEPTABLE FOR THIS PROJECT.

1	REMOVED DETAIL VIEW	RMH	5-16-16	
REV.	DESCRIPTION	BY	MM/DD/YY	CHK'D

SANITITE HP PUSH-THRU MANHOLE	
DRAWING NUMBER:	STD-205G



4640 TRUEMAN BLVD
HILLIARD, OHIO 43026
ADVANCED DRAINAGE SYSTEMS, INC.

DRAWN BY:	RMH
DATE:	1-26-16
CHK'D BY:	CFM
SCALE:	NTS
SHEET	OF