
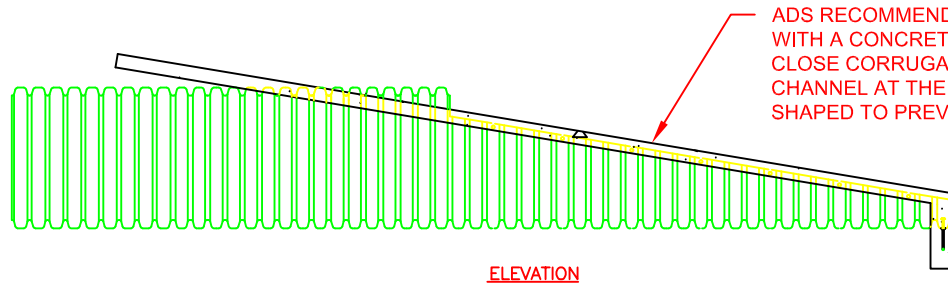


PIPE DIAMETER	2:1 SLOPE					3:1 SLOPE					4:1 SLOPE					6:1 SLOPE				
	A	B	C	D	OAL	A	B	C	D	OAL	A	B	C	D	OAL	A	B	C	D	OAL
12" (300mm)	8" (200mm)	12" (300mm)	3" (76mm)	3" (76mm)	20" (508mm)	8" (200mm)	18" (450mm)	3" (76mm)	3" (76mm)	26" (660mm)	8" (200mm)	24" (600mm)	3" (76mm)	3" (76mm)	32" (813mm)	8" (200mm)	36" (900mm)	3" (76mm)	3" (76mm)	44" (1118mm)
15" (375mm)	9.75" (248mm)	14.8" (376mm)	4" (100mm)	4" (100mm)	24.5" (622mm)	9.75" (248mm)	22" (559mm)	4" (100mm)	4" (100mm)	31.9" (810mm)	9.75" (248mm)	29.4" (747mm)	4" (100mm)	4" (100mm)	39.1" (993mm)	9.75" (248mm)	41.6" (1057mm)	4" (100mm)	4" (100mm)	51.4" (1306mm)
18" (450mm)	12" (300mm)	21" (533mm)	4.2" (107mm)	4" (100mm)	33" (838mm)	12" (300mm)	30" (750mm)	4.2" (107mm)	4" (100mm)	42" (1050mm)	12" (300mm)	39" (991mm)	4.2" (107mm)	4" (100mm)	51" (1295mm)	12" (300mm)	60" (1500mm)	4.2" (107mm)	4" (100mm)	72" (1829mm)
24" (600mm)	16" (406mm)	24" (600mm)	6" (150mm)	6" (150mm)	40" (1016mm)	16" (406mm)	36" (900mm)	6" (150mm)	6" (150mm)	52" (1321mm)	16" (406mm)	48" (1200mm)	6" (150mm)	6" (150mm)	64" (1626mm)	16" (406mm)	72" (1829mm)	6" (150mm)	6" (150mm)	88" (2235mm)
30" (750mm)	16" (406mm)	36" (900mm)	6" (150mm)	6" (150mm)	52" (1321mm)	16" (406mm)	56" (1422mm)	6" (150mm)	6" (150mm)	72" (1829mm)	16" (406mm)	72" (1829mm)	6" (150mm)	6" (150mm)	88" (2235mm)	16" (406mm)	108" (2743mm)	6" (150mm)	6" (150mm)	124" (3150mm)
36" (900mm)	18.5" (470mm)	48.1" (1222mm)	6.9" (175mm)	6" (150mm)	64.6" (1641mm)	18.5" (470mm)	73.9" (1877mm)	6.9" (175mm)	6" (150mm)	92.3" (2344mm)	18.5" (470mm)	96.9" (2461mm)	6.9" (175mm)	6" (150mm)	115.4" (2931mm)					
42" (1050mm)	17.5" (445mm)	64.4" (1636mm)	5.2" (132mm)	6" (150mm)	82" (2083mm)	17.5" (445mm)	73.9" (1877mm)	5.2" (132mm)	6" (150mm)	111.3" (2827mm)	17.5" (445mm)	122.9" (3122mm)	5.2" (132mm)	6" (150mm)	140.5" (3569mm)					
48" (1200mm)	17.5" (445mm)	76.1" (1933mm)	5.4" (137mm)	6" (150mm)	93.6" (2377mm)	17.5" (445mm)	111.2" (2824mm)	5.4" (137mm)	6" (150mm)	128.7" (3269mm)	17.5" (445mm)	146.4" (3719mm)	5.4" (137mm)	6" (150mm)	163.9" (4163mm)					
60" (1500mm)	12" (300mm)	100.6" (2555mm)	3.6" (91mm)	6" (150mm)	112.6" (2860mm)															

\*\* REFERENCE ONLY - DIMENSIONS MAY VARY \*\*

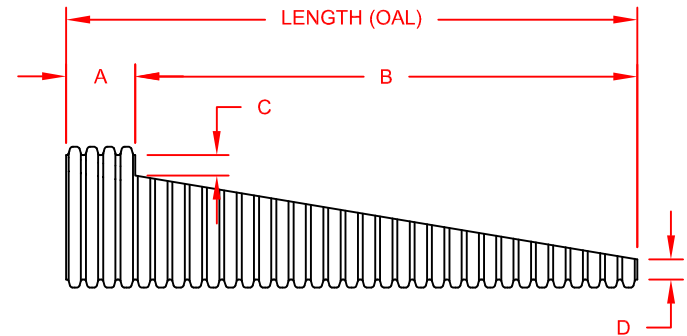

ADS RECOMMENDS THAT THE PRODUCT BE INSTALLED WITH A CONCRETE COLLAR/EDGE TO SUPPORT AND CLOSE CORRUGATIONS PER DOT SPECIFICATIONS. THE CHANNEL AT THE BOTTOM OF THE TAPER MUST BE SHAPED TO PREVENT TOE LIFT BY THE INLET WATER FLOW

© 2016 ADS, INC.

ADVANCED DRAINAGE SYSTEMS, INC. ("ADS") HAS PREPARED THIS DETAIL BASED ON INFORMATION PROVIDED TO ADS. THIS DRAWING IS INTENDED TO DEPICT THE COMPONENTS AS REQUESTED. ADS HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICES FOR THIS PROJECT, NOR HAS ADS INDEPENDENTLY VERIFIED THE INFORMATION SUPPLIED. THE INSTALLATION DETAILS PROVIDED HEREIN ARE GENERAL RECOMMENDATIONS AND ARE NOT SPECIFIC FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION. IT IS THE DESIGN ENGINEERS RESPONSIBILITY TO ENSURE THE DETAILS PROVIDED HEREIN MEETS OR EXCEEDS THE APPLICABLE NATIONAL, STATE, OR LOCAL REQUIREMENTS AND TO ENSURE THAT THE DETAILS PROVIDED HEREIN ARE ACCEPTABLE FOR THIS PROJECT.

4	UPDATED TABLE AND RENAMED	WWL	02/10/16	
REV.	DESCRIPTION	BY	MM/DD/YY	CHK'D

**MITERED END SECTION  
DETAIL**

DRAWING NUMBER: STD-301



4640 TRUEMAN BLVD  
HILLIARD, OHIO 43026

DRAWN BY	CKS/TJR
DATE	4/24/07
CHK'D BY	
SCALE	NTS
SHEET	1 OF 1